



L14 - S14

B - MOLDED RUBBER

Load capacity up to 200kg



RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.

WHEEL

B - Molded Rubber. Hardness: 80 Shore A. (-20°C to +70°C)
Produced with molded vulcanized rubber tread over a grey cast iron wheel center. They roll softly with a low noise level, absorb shocks and vibrations. They are resistant to abrasion and chemicals. They can be used at a speed of up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	(mm)	(mm)	(pol)	Axle Type (bearing)	KG	(mm)		w/o brake (mm)	w/ brake G (mm)
Reference	Reference	Reference	Reference	Reference						GL/FL	GS/FS		
GL 414 BN	FL 414 BN	GS 414 BN	FS 414 BN	R 414 BN	100	38	7/16"	Nylon Socket	150	135	140	88	120
GL 414 BR	FL 414 BR	GS 414 BR	FS 414 BR	R 414 BR				Roller Bearing					
GL 414 BE	FL 414 BE	GS 414 BE	FS 414 BE	R 414 BE				Ball Bearing					
GL 514 BN	FL 514 BN	GS 514 BN	FS 514 BN	R 514 BN				Nylon Socket					
GL 514 BR	FL 514 BR	GS 514 BR	FS 514 BR	R 514 BR	125	38	7/16"	Roller Bearing	175	156	161	103	
GL 514 BE	FL 514 BE	GS 514 BE	FS 514 BE	R 514 BE				Ball Bearing					
GL 614 BN	FL 614 BN	GS 614 BN	FS 614 BN	R 614 BN				Nylon Socket					
GL 614 BR	FL 614 BR	GS 614 BR	FS 614 BR	R 614 BR				Roller Bearing					
GL 614 BE	FL 614 BE	GS 614 BE	FS 614 BE	R 614 BE	150	38	7/16"	Ball Bearing	200	178	183	118	130

Fittings/Accessories




Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below			
Axle hole	16mm	Threaded Stem	1/2"NC X 25mm	Threaded Stem	1/2"NC X 64mm	Stem	Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's

Note: Stem casters overall heights are 3mm less than indicated on table.

Swivel Sections

Top Plate Options

Brake Option

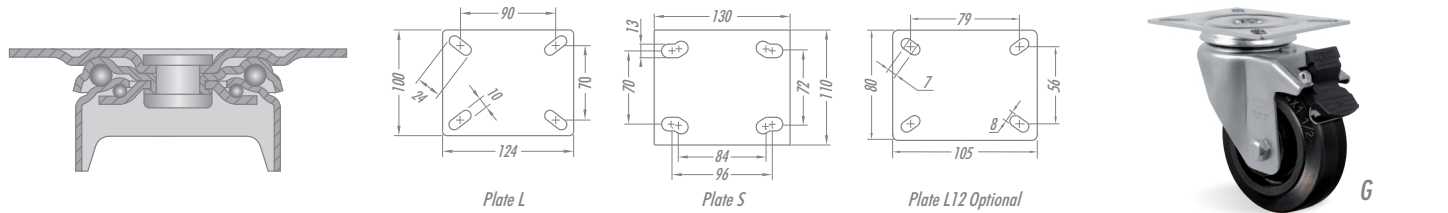

NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2			T3	1" BSP
Ø25	S3	25 - 28	EX 3	27 - 33	EA 4		
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				