

GS - GM

C - CELERON

Load capacity up to 700kg

RIG Reinforced rig, made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



WHEEL

C - Celeron Hardness: 103 Rockwell M. (-30°C to + 120°C)

Manufactured with a compound obtained from macerated cotton fibers drenched with phenolic resin, molded by heat and pressure. They have excellent mechanical properties, are light and rugged, resistant to deformation under static loads and roll easily. They can be used over a wide temperature range. They are resistant to mild oils, greases and acids in low concentrations. Not recommended for applications in wet environments in contact with alkaline substances. (e.g., caustic soda, chlorine, cleaning products, soap and detergent). Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	Axle Type (bearing)	KG	Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster
Reference	Reference	Reference	Reference	Reference	(mm)	(mm)	(pol)					(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake GB (mm)
GS 52 CR	FS 52 CR	GM 52 CR	FM 52 CR	R 52 CR	100	50	1/2"	Roller Bearing	500	165	100	167	180		
GS 52 CE	FS 52 CE	GM 52 CE	FM 52 CE	R 52 CE				Ball Bearing							
GS 62 CR	FS 62 CR	GM 62 CR	FM 62 CR	R 62 CR	125	50	1/2"	Roller Bearing	600	196	121	183	185		
GS 62 CE	FS 62 CE	GM 62 CE	FM 62 CE	R 62 CE				Ball Bearing							
GS 82 CR	FS 82 CR	GM 82 CR	FM 82 CR	R 82 CR	150	50	1/2"	Roller Bearing	700	235	153	210	-		
GS 82 CE	FS 82 CE	GM 82 CE	FM 82 CE	R 82 CE				Ball Bearing							


Fittings/Accessories



Reference	Axle hole 13mm	Threaded Stem 1/2"NC X 32mm	Threaded Stem 1/2"NC X 64mm	Long stem
Reference	SES	SE	SEX	See table below

Swivel Sections

Top Plate Options

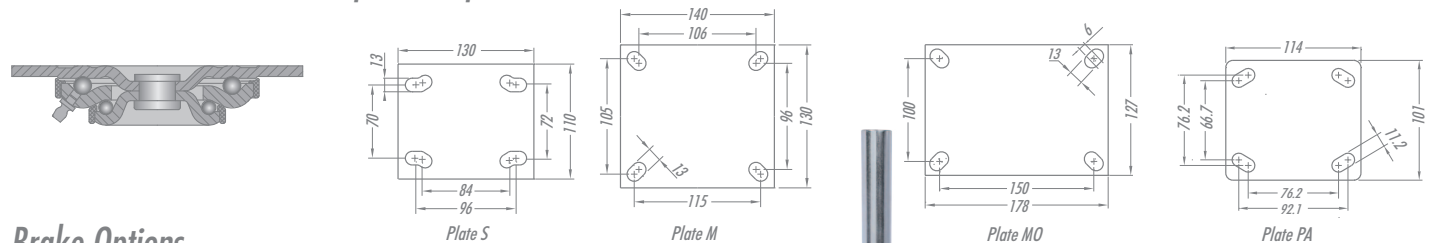

Brake Options



LONG STEM FITTING		
CODE	Ø	HEIGHT
ME 1	1"	150mm
ME 2	1.1/4"	
ME 3	1.5/16"	

*Available only for 52 and 62