



GS - GM

NU - MOLDED POLYURETHANE

Load capacity up to 700kg

RIG Reinforced rig, made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



WHEEL

NU - Moulded polyurethane with Nylon Wheel Center. Hardness: 90 Shore A. (-40°C to + 80°C)
 Produced with a molded polyurethane tread and injected nylon wheel center. The mechanical bond system ensures excellent resistance and service life. Ideal for applications on various surface and environment types. They are light, withstand high loads, protect the floor, require less effort to handle and produce low noise level during handling. They have an excellent resistance to abrasion, impacts, weathering and chemicals such as greases, oils, salts and solvents. They may be used in a speed up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake GB (mm)
GS 42 NUN	FS 42 NUN	GM 42 NUN	FM 42 NUN	R 42 NUN	100	50	1/2"	Nylon Socket	250	138	87	150	-
GS 42 NUR	FS 42 NUR	GM 42 NUR	FM 42 NUR	R 42 NUR				Roller Bearing					
GS 42 NUE	FS 42 NUE	GM 42 NUE	FM 42 NUE	R 42 NUE				Ball Bearing					
GS 52 NUN	FS 52 NUN	GM 52 NUN	FM 52 NUN	R 52 NUN	125	50	1/2"	Nylon Socket	350	165	100	167	180
GS 52 NUR	FS 52 NUR	GM 52 NUR	FM 52 NUR	R 52 NUR				Roller Bearing					
GS 52 NUE	FS 52 NUE	GM 52 NUE	FM 52 NUE	R 52 NUE				Ball Bearing					
GS 62 NUN	FS 62 NUN	GM 62 NUN	FM 62 NUN	R 62 NUN	150	50	1/2"	Nylon Socket	400	196	121	183	185
GS 62 NUR	FS 62 NUR	GM 62 NUR	FM 62 NUR	R 62 NUR				Roller Bearing					
GS 62 NUE	FS 62 NUE	GM 62 NUE	FM 62 NUE	R 62 NUE				Ball Bearing					
GS 82 NUN	FS 82 NUN	GM 82 NUN	FM 82 NUN	R 82 NUN	200	50	1/2"	Nylon Socket	550	235	153	210	-
GS 82 NUR	FS 82 NUR	GM 82 NUR	FM 82 NUR	R 82 NUR				Roller Bearing					
GS 82 NUE	FS 82 NUE	GM 82 NUE	FM 82 NUE	R 82 NUE				Ball Bearing					
GS 102 NUN	FS 102 NUN	GM 102 NUN	FM 102 NUN	R 102 NUN	250	50	1/2"	Nylon Socket	700	292	193	235	-
GS 102 NUE	FS 102 NUE	GM 102 NUE	FM 102 NUE	R 102 NUE				Ball Bearing					

Fittings/Accessories



Axle hole
13mm



Threaded Stem
1/2"NC X 32mm



Threaded Stem
1/2"NC X 64mm







Long stem

Reference	SES	SE	SEX	See table below
-----------	-----	----	-----	-----------------

Swivel Sections

Top Plate Options

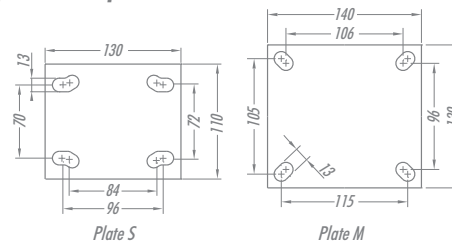

Brake Options



GB* - Pedal Brake



FP - Pedal Brake



FL - Side Brake

LONG STEM FITTING		
CODE	Ø	HEIGHT
ME 1	1"	150mm
ME 2	1.1/4"	
ME 3	1.5/16"	

*Available only for 52 and 62