

# CARGO SKY








**Load capacity up to 250kg**

**RIG** Caster with rig made of zinc-plated steel with ball bearing swivel section totally guarded to avoid dust penetration, besides an excellent resistance to impacts.



**WHEEL** NT - Technical Nylon. Hardness: 75 Shore D. (-40°C to + 110°C)  
Produced with high quality nylon 6.0 tread and wheel center. They are light and have an excellent mechanical resistance, roll very easily, requiring less effort in maneuvering and handling. Ideal for applications in wet environments, they are resistant to greases, oils, salts and some kinds of acids. Manufactured of recycled material. Nominal working speed is up to 4km/h.





Reference	 (mm)	 (mm)	 (mm)	 (mm)	Axle Type (bearing)	 KG	 (mm)	 (mm)
GLUP 214 NTE	57	35	8	45	Ball Bearing	250	96	55
GLUP 314 NTE	70						102	61

**Swivel Sections**

**Top Plate**

**Accessories**

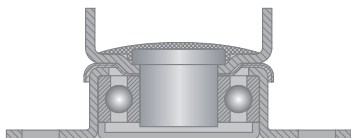

Caster Guard