

# L10

## NTT - TECHNICAL NYLON

Load capacity up to 80kg









### RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




### Wheel

NTT - Technical Nylon. Hardness: 75 Shore D. (-40°C to + 110°C)  
Produced with single injection high quality polyamide nylon 6.0. They are light weight, with a good mechanical resistance, roll very easily, requiring less effort in handling and maneuvering, under static loads they are resistant to deformation. Ideal for applications in wet environments, they are resistant to greases, oils, salts and some kinds of acids. Manufactured of recycled material. Nominal working speed is up to 4km/h.


Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake FPI (mm)
GL 158 NTT	-	R 158 NTT	41	17				57	41	-	-
GL 210 NTT	FL 210 NTT	R 210 NTT	50	19	1/4"	Plain Bearing	80	67	45	78	75
GL 310 NTT	FL 310 NTT	R 310 NTT	75					92	65	94	89

### Fittings/Accessories

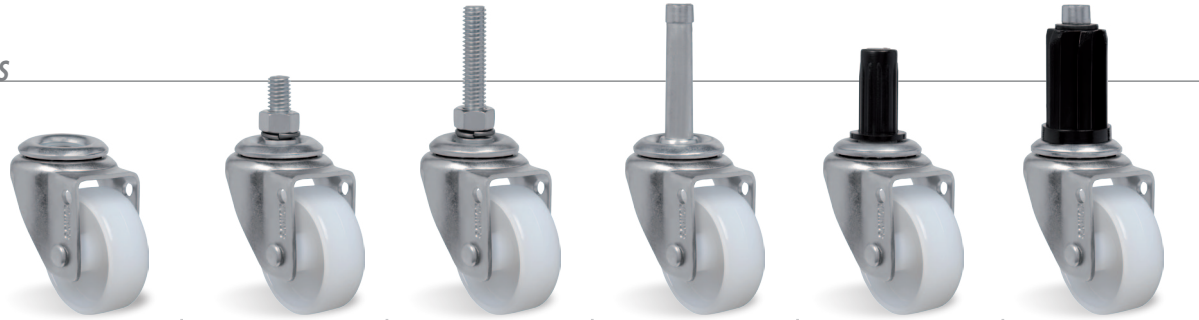


Reference	Axle hole 10mm LES	Threaded Stem 3/8" x 25mm LE	Threaded Stem 3/8" x 50mm LEX	Stem Ø7/16" X 50mm LEL	Nylon Socket Ø15mm X 32mm LELSJ	Nylon Socket Fitting See table below
-----------	--------------------------	------------------------------------	-------------------------------------	------------------------------	---------------------------------------	---


### Swivel Sections



### Top Plate Options

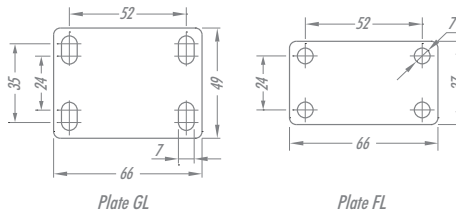

### Brake Options

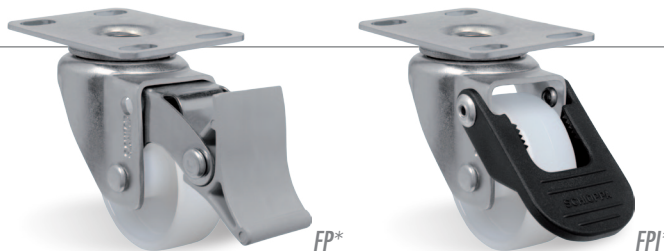

NYLON SOCKET FITTING	
SIZE (mm)	REFERENCE
Ø38	S1
Ø30	S2
Ø25	S3
40 x 40	S4

\* 210/310