



# L14 - S14

## NT - TECHNICAL NYLON

**Load capacity up to 300kg**



**RIG**

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.


**WHEEL**

NT - Technical Nylon. Hardness: 75 Shore D. (-40°C to + 110°C)  
Produced with high quality nylon 6.0 tread and wheel center. They are light and have an excellent mechanical resistance, roll very easily, requiring less effort in maneuvering and handling. Ideal for applications in wet environments, they are resistant to greases, oils, salts and some kinds of acids. Manufactured of recycled material. Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	(mm)	(mm)	(pol)	Axle Type (bearing)	KG	(mm)		w/o brake (mm)	w/ brake G (mm)	
Reference	Reference	Reference	Reference	Reference						GL/FL	FL/FS			
GL 414 NTN	FL 414 NTN	GS 414 NTN	FS 414 NTN	R 414 NTN	100	38	7/16"	Nylon Socket	200	135	140	88	120	
GL 414 NTE	FL 414 NTE	GS 414 NTE	FS 414 NTE	R 414 NTE		32		Ball Bearing						
GL 514 NTN	FL 514 NTN	GS 514 NTN	FS 514 NTN	R 514 NTN	125	38		Nylon Socket	250	156	161	103		
GL 514 NTE	FL 514 NTE	GS 514 NTE	FS 514 NTE	R 514 NTE		32		Ball Bearing						
GL 614 NTN	FL 614 NTN	GS 614 NTN	FS 614 NTN	R 614 NTN	150	38		Nylon Socket	300	178	183	118		130
GL 614 NTE	FL 614 NTE	GS 614 NTE	FS 614 NTE	R 614 NTE		32		Ball Bearing						


**Fittings/Accessories**

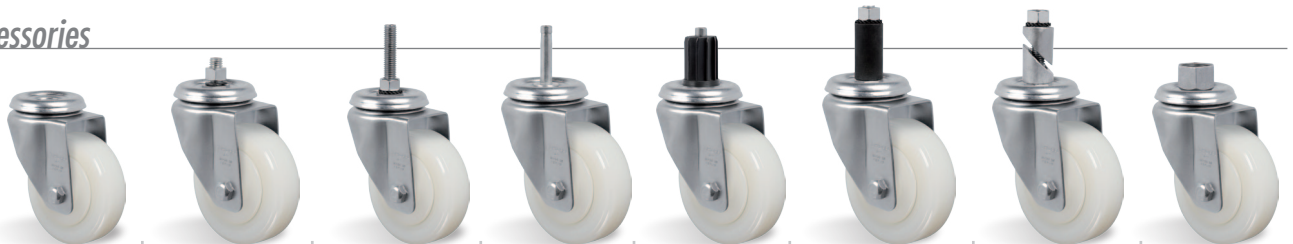


Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below
	Axle hole 16mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's

Note: Stem casters overall heights are 3mm less than indicated on table.

**Swivel Sections**



**Top Plate Options**

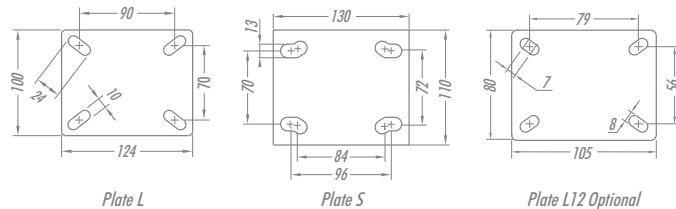

**Brake Option**



NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2			T3	1" BSP
Ø25	S3	25 - 28	EX 3	27 - 33	EA 4		
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				