

L14 - S14

F - CAST IRON

Load capacity up to 300kg



RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.

WHEEL

F - Cast Iron. Hardness: 160 Brinell. (-40°C to +400°C)

Produced with grey cast iron, they roll easily offering a great handling effort reduction. They are very resistant withstanding high loads and temperatures. They are not indicated to utilization when noise level and floor maintenance are required.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)	KG				
Reference	Reference	Reference	Reference	Reference	(mm)	(mm)	(pol)			GL/FS (mm)	GS/FS (mm)	w/o brake (mm)	w/ brake G (mm)
GL 414 FN	FS 414 FN	GS 414 FN	FS 414 FN	R 414 FN	100	38	7/16"	Plain Bearing	300	135	140	88	120
GL 414 FR	FL 414 FR	GS 414 FR	FS 414 FR	R B14 FR				Roller Bearing					
GL 414 FE	FL 414 FE	GS 414 FE	FS 414 FE	R 414 FE				Ball Bearing					
GL 514 FN	FL 514 FN	GS 514 FN	FS 514 FN	R 514 FN	125	38	7/16"	Plain Bearing	300	156	161	103	120
GL 514 FR	FL 514 FR	GS 514 FR	FS 514 FR	R 514 FR				Roller Bearing					
GL 514 FE	FL 514 FE	GS 514 FE	FS 514 FE	R 514 FE				Ball Bearing					
GL 614 FN	FL 614 FN	GS 614 FN	FS 614 FN	R 614 FN	150	38	7/16"	Plain Bearing	300	178	183	118	130
GL 614 FR	FL 614 FR	GS 614 FR	FS 614 FR	R 614 FR				Roller Bearing					
GL 614 FE	FL 614 FE	GS 614 FE	FS 614 FE	R 614 FE				Ball Bearing					


Fittings/Accessories




Reference	Axle hole 16mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
LES	LE	LEX	LEL	See table below	See table below	See table below	See table below	See table below

Note: Stem casters overall heights are 3mm less than indicated on table.

Swivel Sections



Top Plate Options

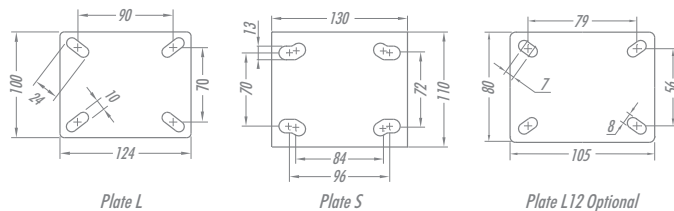

Brake Option



NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2				
Ø25	S3	25 - 28	EX 3	27 - 33	EA 4	T3	1" BSP
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				