


L16

BP - PVC

Load capacity up to 200kg





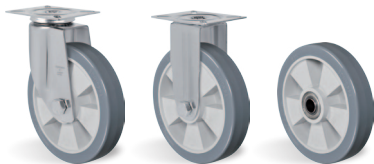



RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




WHEEL

BP - Thermoplastic Compound with PVC. Hardness: 80 Shore A. (-10°C to + 50°C)
Produced with recyclable thermoplastic compound with PVC tread and polypropylene copolymer wheel center. They offer a soft and quiet rolling, great floor protection, good chemical, wear and impact resistance, resulting in an excellent cost-benefit ratio. Nominal working speed is up to 4km/h.

Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake G (mm)	w/ brake S (mm)
GL 816 BPN	FL 816 BPN	R 816 BPN	200	41	5/8"	Nylon Socket	150	241	155	155	-
GL 816 BPE	FL 816 BPE	R 816 BPE				Ball Bearing					
GL 916 BPN	FL 916 BPN	R 916 BPN	225			Nylon Socket	170	280	180	-	180
GL 916 BPE	FL 916 BPE	R 916 BPE				Ball Bearing					
GL 1016 BPN	FL 1016 BPN	R 1016 BPN	250			Nylon Socket	200	294	193	-	193
GL 1016 BPE	FL 1016 BPE	R 1016 BPE				Ball Bearing					


Fittings/Accessories

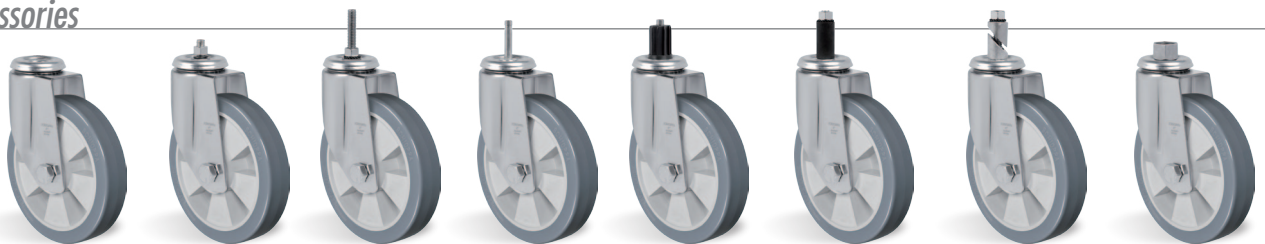


	Axle hole 16mm	Threaded Stem 1/2"NC x 25mm	Threaded Stem 1/2"NC x 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below

Note: Stem casters overall heights are 3mm less than indicated on table.


Swivel Sections






Top Plate Options

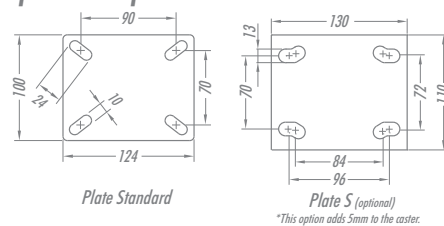

Brake Options

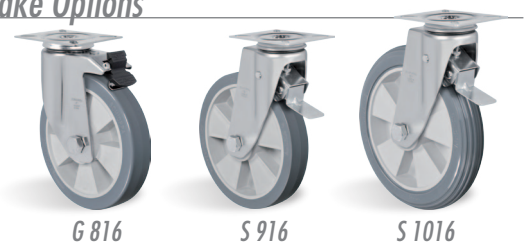

NYLON SOCKET FITTING 		RUBBER EXPANDER FITTING 		ALUMINUM EXPANDER FITTING 		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE		
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T1	1/2" BSP
Ø30	S2	21 - 24	EX 2	27 - 33	EA 4	T2	3/4" BSP
Ø25	S3	25 - 28	EX 3			T3	1" BSP
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				