

L16

TP - THERMOPLASTIC COMPOUND


Load capacity up to 210kg









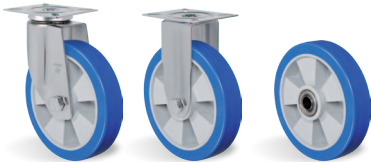

RIG Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.


WHEEL

TP - Thermoplastic Compound. Hardness: 80 Shore A. (-10°C to + 50°C)
Produced with recyclable thermoplastic compound tread and polypropylene copolymer wheel center. They offer a soft and quiet rolling, excellent floor protection, good chemical, wear and impact resistance, resulting in an excellent cost-benefit ratio. Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)			(mm)	w/o brake (mm)	w/ brake G (mm)	w/ brake S (mm)
GL 816 TPN	FL 816 TPN	R 816 TPN	200	41	5/8"	Nylon Socket	165	241	155	155	-
GL 816 TPE	FL 816 TPE	R 816 TPE				Ball Bearing					
GL 916 TPN	FL 916 TPN	R 916 TPN	225			Nylon Socket	185	280	180	-	180
GL 916 TPE	FL 916 TPE	R 916 TPE				Ball Bearing					
GL 1016 TPN	FL 1016 TPN	R 1016 TPN	250	Nylon Socket	210	294	193	-	193		
GL 1016 TPE	FL 1016 TPE	R 1016 TPE		Ball Bearing							


Fittings/Accessories

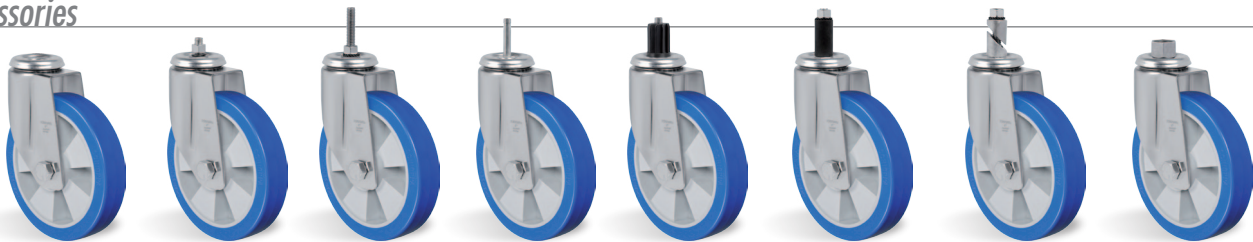


	Axle hole 16mm	Threaded Stem 1/2"NC x 25mm	Threaded Stem 1/2"NC x 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below

Note: Stem casters overall heights are 3mm less than indicated on table.


Swivel Sections






Top Plate Options

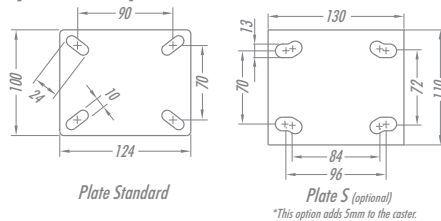

Brake Options

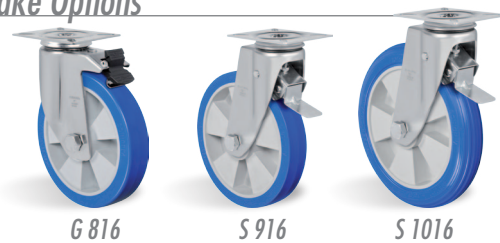

NYLON SOCKET FITTING 		RUBBER EXPANDER FITTING 		ALUMINUM EXPANDER FITTING 		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2	27 - 33	EA 4	T3	1" BSP
Ø25	S3	25 - 28	EX 3				
∅ 40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				