




# L16

Load capacity up to 250kg





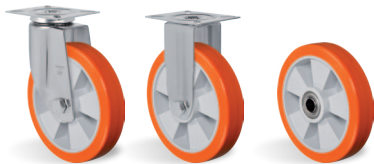



**RIG**

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




**WHEEL**

UP - Thermoplastic Polyurethane. Hardness: 90 Shore A. (-20°C to + 70°C)  
Produced with recyclable thermoplastic elastollan polyurethane tread and polypropylene copolymer wheel center. Ideal for those who look for an excellent load capacity added to great floor protection with low noise rolling, offering an excellent resistance to abrasion and impacts. Resistant to greases, mineral oils and some acids. Nominal working speed is up to 4km/h.

Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake G (mm)	w/ brake S (mm)
GL 816 UPN	FL 816 UPN	R 816 UPN	200	41	5/8"	Nylon Socket	200	241	155	155	-
GL 816 UPE	FL 816 UPE	R 816 UPE				Ball Bearing					
GL 916 UPN	FL 916 UPN	R 916 UPN	225			Nylon Socket	220	280	180	-	180
GL 916 UPE	FL 916 UPE	R 916 UPE				Ball Bearing					
GL 1016 UPN	FL 1016 UPN	R 1016 UPN	250			Nylon Socket	250	294	193	-	193
GL 1016 UPE	FL 1016 UPE	R 1016 UPE				Ball Bearing					


**Fittings/Accessories**

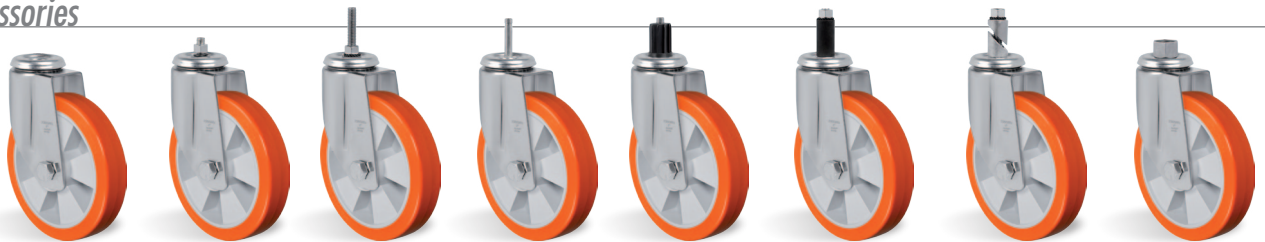


	Axle hole 16mm	Threaded Stem 1/2"NC x 25mm	Threaded Stem 1/2"NC x 64mm	Stem Ø7/16" x 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below

Note: Stem casters overall heights are 3mm less than indicated on table.


**Swivel Sections**






**Top Plate Options**

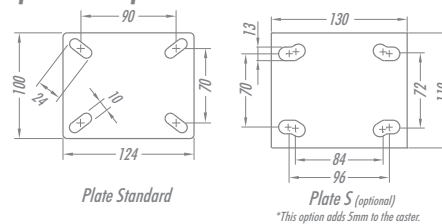

**Brake Options**

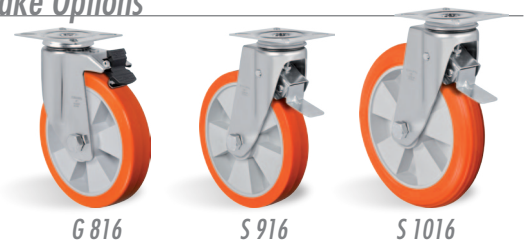

NYLON SOCKET FITTING 		RUBBER EXPANDER FITTING 		ALUMINUM EXPANDER FITTING 		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE		
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T1	1/2" BSP
Ø30	S2	21 - 24	EX 2	27 - 33	EA 4	T2	3/4" BSP
Ø25	S3	25 - 28	EX 3			T3	1" BSP
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				