

# GS - GM

## SP - SOFT RUBBER

Load capacity up to 400kg

**RIG** Reinforced rig, made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



### WHEEL

SP - Extra Soft Thermoplastic Rubber. Hardness: 65 Shore A. (-10°C to +50°C)  
 Injected recyclable thermoplastic extra soft rubber tread and polypropylene copolymer wheel center. Its advantages are the extremely low noise level and vibration reduction. Indicated for light load handling, they offer an excellent floor protection and regular resistance to impacts and chemicals. Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	(mm)	(mm)	(pol)	Axle Type (bearing)	KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake GB (mm)
Reference	Reference	Reference	Reference	Reference	(mm)	(mm)	(pol)			(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake GB (mm)
GS 42 SPN	FS 42 SPN	GM 42 SPN	FM 42 SPN	R 42 SPN	100	50	1/2"	Nylon Socket	150	138	87	150	-
GS 42 SPR	FS 42 SPR	GM 42 SPR	FM 42 SPR	R 42 SPR				Roller Bearing					
GS 42 SPE	FS 42 SPE	GM 42 SPE	FM 42 SPE	R 42 SPE				Ball Bearing					
GS 52 SPN	FS 52 SPN	GM 52 SPN	FM 52 SPN	R 52 SPN	125	50	1/2"	Nylon Socket	200	165	100	167	180
GS 52 SPR	FS 52 SPR	GM 52 SPR	FM 52 SPR	R 52 SPR				Roller Bearing					
GS 52 SPE	FS 52 SPE	GM 52 SPE	FM 52 SPE	R 52 SPE				Ball Bearing					
GS 62 SPN	FS 62 SPN	GM 62 SPN	FM 62 SPN	R 62 SPN	150	50	1/2"	Nylon Socket	250	196	121	183	185
GS 62 SPR	FS 62 SPR	GM 62 SPR	FM 62 SPR	R 62 SPR				Roller Bearing					
GS 62 SPE	FS 62 SPE	GM 62 SPE	FM 62 SPE	R 62 SPE				Ball Bearing					
GS 82 SPN	FS 82 SPN	GM 82 SPN	FM 82 SPN	R 82 SPN	200	50	1/2"	Nylon Socket	300	235	153	210	-
GS 82 SPR	FS 82 SPR	GM 82 SPR	FM 82 SPR	R 82 SPR				Roller Bearing					
GS 82 SPE	FS 82 SPE	GM 82 SPE	FM 82 SPE	R 82 SPE				Ball Bearing					
GS 102 SPN	FS 102 SPN	GM 102 SPN	FM 102 SPN	R 102 SPN	250	50	1/2"	Nylon Socket	400	292	193	235	-
GS 102 SPE	FS 102 SPE	GM 102 SPE	FM 102 SPE	R 102 SPE				Ball Bearing					


### Fittings/Accessories



Reference	Axle hole 13mm	Threaded Stem 1/2"NC X 32mm	Threaded Stem 1/2"NC X 64mm	Long stem
Reference	SES	SE	SEX	See table below

### Swivel Sections

### Top Plate Options

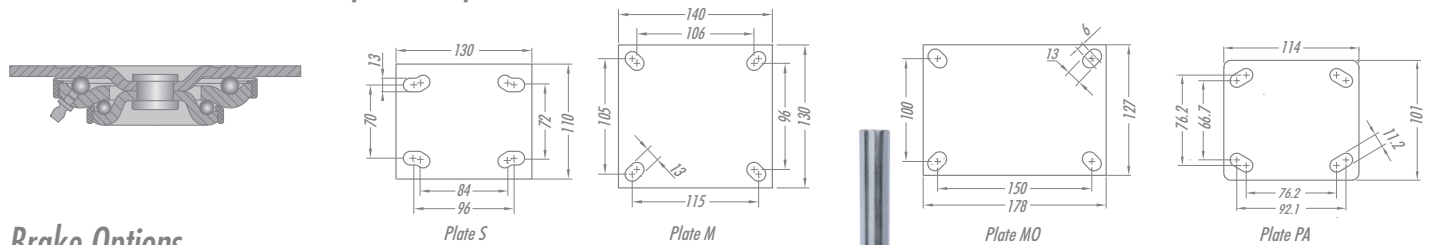

### Brake Options



LONG STEM FITTING		
CODE	Ø	HEIGHT
ME 1	1"	150mm
ME 2	1.1/4"	
ME 3	1.5/16"	

\*Available only for 52 and 62