

GS - GM

TP - THERMOPLASTIC COMPOUND

Load capacity up to 400kg

RIG Reinforced rig, made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



WHEEL

TP - Thermoplastic Compound. Hardness: 80 Shore A. (-10°C to +50°C)

Produced with recyclable thermoplastic compound tread and polypropylene copolymer wheel center. They offer a soft and quiet rolling, excellent floor protection, good chemical, wear and impact resistance, resulting in an excellent cost-benefit ratio. Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	(mm)	(mm)	(pol)	Axle Type (bearing)	KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake GB (mm)
Reference	Reference	Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake GB (mm)
GS 42 TPN	FS 42 TPN	GM 42 TPN	FM 42 TPN	R 42 TPN	100	50	1/2"	Nylon Socket	150	138	87	150	-
GS 42 TPR	FS 42 TPR	GM 42 TPR	FM 42 TPR	R 42 TPR				Roller Bearing					
GS 42 TPE	FS 42 TPE	GM 42 TPE	FM 42 TPE	R 42 TPE				Ball Bearing					
GS 52 TPN	FS 52 TPN	GM 52 TPN	FM 52 TPN	R 52 TPN	125	50	1/2"	Nylon Socket	200	165	100	167	180
GS 52 TPR	FS 52 TPR	GM 52 TPR	FM 52 TPR	R 52 TPR				Roller Bearing					
GS 52 TPE	FS 52 TPE	GM 52 TPE	FM 52 TPE	R 52 TPE				Ball Bearing					
GS 62 TPN	FS 62 TPN	GM 62 TPN	FM 62 TPN	R 62 TPN	150	50	1/2"	Nylon Socket	250	196	121	183	185
GS 62 TPR	FS 62 TPR	GM 62 TPR	FM 62 TPR	R 62 TPR				Roller Bearing					
GS 62 TPE	FS 62 TPE	GM 62 TPE	FM 62 TPE	R 62 TPE				Ball Bearing					
GS 82 TPN	FS 82 TPN	GM 82 TPN	FM 82 TPN	R 82 TPN	200	50	1/2"	Nylon Socket	300	235	153	210	-
GS 82 TPR	FS 82 TPR	GM 82 TPR	FM 82 TPR	R 82 TPR				Roller Bearing					
GS 82 TPE	FS 82 TPE	GM 82 TPE	FM 82 TPE	R 82 TPE				Ball Bearing					
GS 102 TPN	FS 102 TPN	GM 102 TPN	FM 102 TPN	R 102 TPN	250	50	1/2"	Nylon Socket	400	292	193	235	-
GS 102 TPE	FS 102 TPE	GM 102 TPE	FM 102 TPE	R 102 TPE				Ball Bearing					





Fittings/Accessories



Reference	Axle hole 13mm	Threaded Stem 1/2"NC X 32mm	Threaded Stem 1/2"NC X 64mm	Long stem
Reference	SES	SE	SEX	See table below

Swivel Sections

Top Plate Options

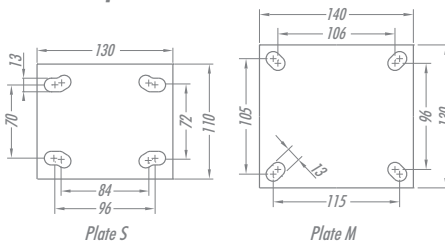

Brake Options



LONG STEM FITTING		
CODE	Ø	HEIGHT
ME 1	1"	150mm
ME 2	1.1/4"	
ME 3	1.5/16"	

*Available only for 52 and 62