



GS - GM

STR - THERMOPLASTIC RUBBER

Load capacity up to 250kg

RIG Reinforced rig, made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



WHEEL

STR - Thermoplastic Rubber. Hardness: 70 Shore A. (-20°C to + 70°C)
Produced with recyclable thermoplastic rubber tread and polypropylene copolymer center. Wheel tread profile has a grooved pattern enabling a better adherence in external and internal floors. They offer a soft and quiet rolling, excellent floor protection, good chemical resistance, and wear and impact resistance. Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake GB (mm)
GS 62 STRE	FS 62 STRE	GM 62 STRE	FM 62 STRE	R 62 STRE	150	50	1/2"	Ball Bearing	250	196	121	153	185



Fittings/Accessories



Reference	Axle hole 13mm	Threaded Stem 1/2"NC X 32mm	Threaded Stem 1/2"NC X 64mm	Long stem
	SES	SE	SEX	See table below

Swivel Sections

Top Plate Options

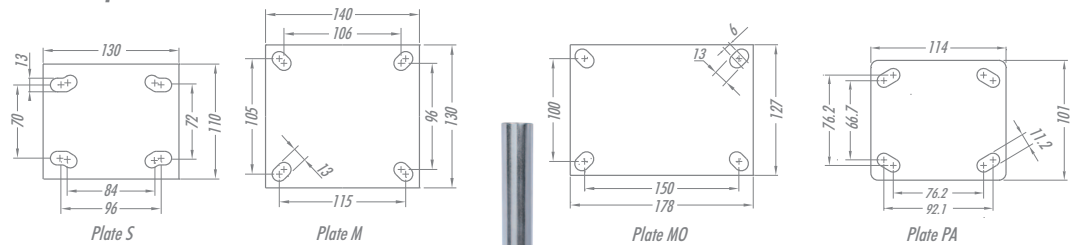

Brake Options



LONG STEM FITTING		
CODE	Ø	HEIGHT
ME 1	1"	150mm
ME 2	1.1/4"	
ME 3	1.5/16"	

*Available only for 52 and 62