

ERGONOMIC

TP - THERMOPLASTIC COMPOUND

Load capacity up to 400kg








RIG Reinforced without central pin, with single hardened and guarded ball raceway. Bolted wheel axle.




WHEEL

TP - Thermoplastic Compound. Hardness: 80 Shore A. (-10°C to + 50°C)
Produced with recyclable thermoplastic compound tread and polypropylene copolymer wheel center. They offer a soft and quiet rolling, excellent floor protection, good chemical, wear and impact resistance, resulting in an excellent cost-benefit ratio. Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)				
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)
GKSR 42 TPN	FKSR 42 TPN	R 42 TPN	100	50	1/2"	Nylon Socket	150	145	75	135
GKSR 42 TPR	FKSR 42 TPR	R 42 TPR				Roller Bearing				
GKSR 42 TPE	FKSR 42 TPE	R 42 TPE				Ball Bearing				
GKSR 52 TPN	FKSR 52 TPN	R 52 TPN	125			Nylon Socket	200	165	92	140
GKSR 52 TPR	FKSR 52 TPR	R 52 TPR				Roller Bearing				
GKSR 52 TPE	FKSR 52 TPE	R 52 TPE				Ball Bearing				
GKSR 62 TPN	FKSR 62 TPN	R 62 TPN	150			Nylon Socket	250	190	132	180
GKSR 62 TPR	FKSR 62 TPR	R 62 TPR				Roller Bearing				
GKSR 62 TPE	FKSR 62 TPE	R 62 TPE				Ball Bearing				
GKSR 82 TPN	FKSR 82 TPN	R 82 TPN	200			Nylon Socket	300	241	173	210
GKSR 82 TPE	FKSR 82 TPE	R 82 TPE				Ball Bearing				
GKSR 102 TPN	FKSR 102 TPN	R 102 TPN	250			Nylon Socket	400	292	211	240
GKSR 102 TPE	FKSR 102 TPE	R 102 TPE		Ball Bearing						

Accessories/Brake Options

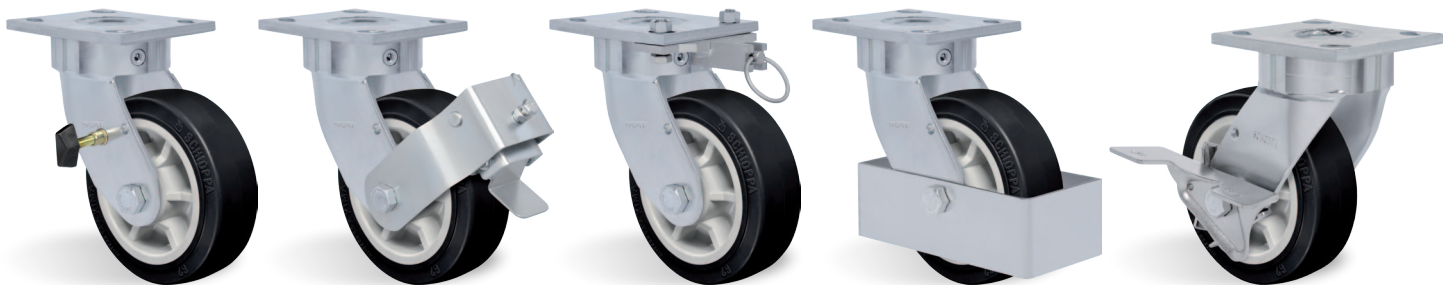

Side Brake - FL

Pedal Brake - FP


Swivel Lock - AD

Caster Guard - GC

Side Lock - SL

Upon Request

Swivel Sections



Top Plate Options

