

ERGONOMIC

NU - MOLDED POLYURETHANE








Load capacity up to 700kg

RIG Reinforced without central pin, with single hardened and guarded ball raceway. Bolted wheel axle.




WHEEL

NU - Molded polyurethane with Nylon Wheel Center. Hardness: 90 Shore A. (-40°C to + 80°C)
Produced with a molded polyurethane tread and injected nylon wheel center. The mechanical bond system ensures excellent resistance and service life. Ideal for applications on various surface and environment types. They are light, withstand high loads, protect the floor, require less effort to handle and produce low noise level during handling. They have an excellent resistance to abrasion, impacts, weathering and chemicals such as greases, oils, salts and solvents. They may be used in a speed up to 4km/h.

Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)				
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)
GKSR 42 NUE	FKSR 42 NUE	R 42 NUE	100	50	1/2"	Ball Bearing	250	143	75	135
GKSR 52 NUE	FKSR 52 NUE	R 52 NUE	125					165	92	140
GKSR 62 NUE	FKSR 62 NUE	R 62 NUE	150					190	132	190
GKSR 82 NUE	FKSR 82 NUE	R 82 NUE	200					241	173	210
GKSR 102 NUE	FKSR 102 NUE	R 102 NUE	250					292	211	240

Accessories/Brake Options

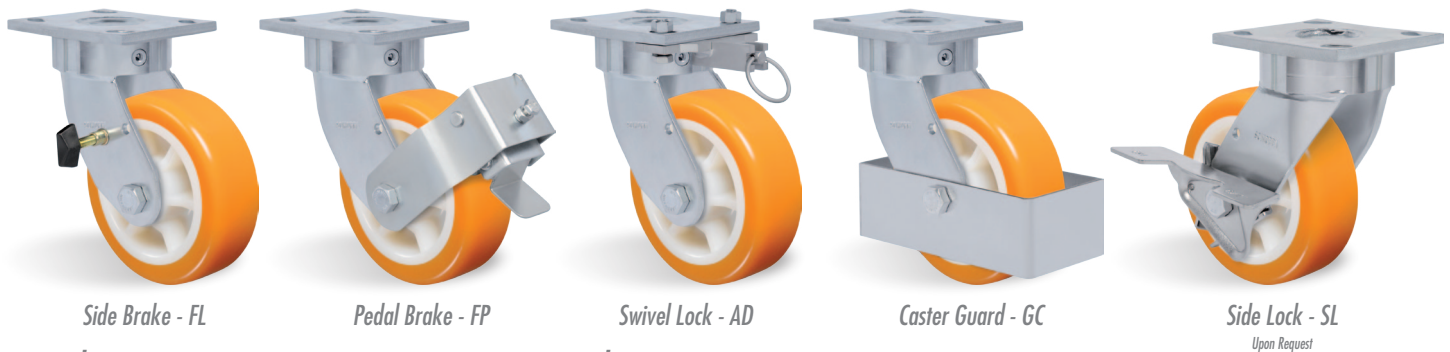

Swivel Sections

Top Plate Options

