


# ERGONOMIC Heavy Duty

## P - MOLDED POLYURETHANE





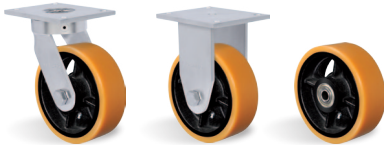


Load capacity up to 1400kg

**RIG** Reinforced rig, made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



### WHEEL

P - Moulded Polyurethane. Hardness: 90 Shore A. (-40°C to + 80°C)  
Produced with a molded polyurethane tread and grey cast iron wheel center. Ideal for applications on various surface and environment types. They withstand high loads, protect the floor, require less effort to handle, produce low noise level during handling, and have an excellent service life. They have great resistance to abrasion, impacts, weathering and chemicals such as greases, oils, salts and solvents. They can be used at a speed of up to 20km/h when mounted with ball bearings.

Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)				
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)
GKMP 63 PR	FKMP 63 PR	R 63 PR	150	70	3/4"	Roller Bearing	1000	190	112	195
GKMP 63 PE	FKMP 63 PE	R 63 PE				Ball Bearing				
GKMP 83 PR	FKMP 83 PR	R 83 PR	200			Roller Bearing	1200	257	155	230
GKMP 83 PE	FKMP 83 PE	R 83 PE				Ball Bearing				
GKMP 103 PE	FKMP 103 PE	R 103 PE	250			Ball Bearing	1300	292	185	270
GKMP 123 PE	FKMP 123 PE	R 123 PE	300			Roller Bearing	1400	343	220	310

### Accessories/Brake Options



Side Brake - FL



Pedal Brake - FP




Swivel Lock - AD



Caster Guard - GC

### Swivel Sections



### Top Plate Options




Plate KMPA




Plate KMP