

ENVIRONMENTAL

PMP

Wheel for 120 Liters and 240 Liters plastic container



R PMP 200



R PMP 250







R PMP 300




WHEEL


PMP – Solid Tire – Polypropilene Core Hardness: 80 Shore A. (– 20°C to + 70°C)

Manufactured with a solid rubber rim and injected polypropilene wheel center. Indicated for waste collect container applications. Indicated for irregular floors where handling easiness, and impact and vibration damping is required. They offer an easy maintenance.

Wheel Reference	 (mm)	 (mm)	 (mm)	 KG
R PMP 200	200	50	21,5	140
R PMP 250	250	52		220
R PMP 300	300			

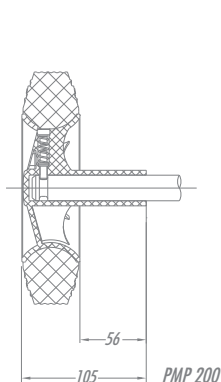

PMP 200

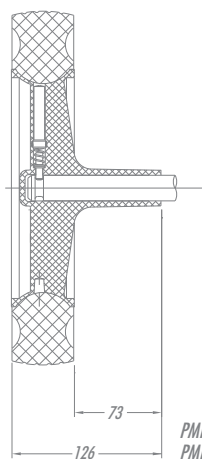

PMP 250
PMP 300



SOLID



TUBULAR



Most used axles

Diameter (A) (mm)	Axle Length (B) (mm)
21,5	445
	460
	475
	485
	495
	555
	595

Available as tubular or solid axles.