








GMC

CASTER FOR 1000L AND 1200L METALLIC WASTE CONTAINER




GMC 63 BE

B WHEEL - Molded Rubber. Hardness: 80 Shore A. (-20°C to +70°C). Manufactured with molded rubber tread on a cast iron core. This wheel mitigates noise pollution and provides smooth rolling. Absorbs shocks and vibrations. Resistant to abrasion and chemicals. The recommended traveling speed is up to 20km/h when mounted with selected ball bearings and appropriate rig.


Swivel Caster	Rigid Caster	Wheel	 (mm)	 (mm)	 (pol)		 KG	 (mm)	 (mm)
Reference									
GMC 63 CB	FMC 63 CB	R 63 CB	150	60	1/2"	Plain Bearing	300	196	121
GMC 63 BR	FMC 63 BR	R 63 BR		70		Roller Bearing			
GMC 63 BE	FMC 63 BE	R 63 BE				Ball Bearing			

It is provided with zerk fitting for lubrication when assembled with roller bearings or on request.

Swivel Section

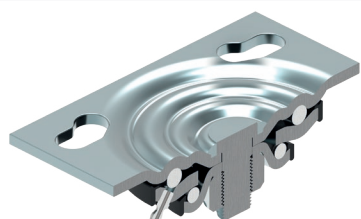

Top Plate



Top Plate M

GMSV/GMS/GMPX

CASTER FOR 1000L AND 1200L METALLIC WASTE CONTAINER










GMSV 63 CB



GMS 63 CB




GMPX 63 BR


Swivel Caster	Wheel	 (mm)	 (mm)	 (pol)		 KG	 (mm)	 (mm)
Reference								
GMSV 63 CB	R 63 CB	150	60	3/4"	Plain Bearing	300	211	130
GMS 63 CB	R 63 CB							
GMS 63 BR	R 63 BR		70		Roller Bearing	400	218	115
GMPX 63 BR	R 63 BR							

It is provided with zerk fitting for lubrication when assembled with roller bearings or on request.


Swivel Section



GMSV




GMS



GMPX

Top Plate



Top Plate GMSV/GMS/GMPX