

L10

SP - SOFT RUBBER

Load capacity up to 40kg











RIG Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




Wheel

SP - Extra Soft Thermoplastic Rubber. Hardness: 65 Shore A. (-10°C to + 50°C)
 Injected recyclable thermoplastic extra soft rubber tread and polypropylene copolymer wheel center. Its advantages are the extremely low noise level and vibration reduction. Indicated for light load handling, they offer an excellent floor protection and regular resistance to impacts and chemicals. Nominal working speed is up to 4km/h.


Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake FPI (mm)
GL 158 SP	-	R 158 SP	41	17	1/4"	Plain Bearing	25	57	41	-	-
GL 210 SP	FL 210 SP	R 210 SP	50	19			30	67	45	78	75
GL 310 SP	FL 310 SP	R 310 SP	75				35	92	65	94	89
GL 410 SP	-	R 410 SP	100				40	122	89	111	-

Fittings/Accessories

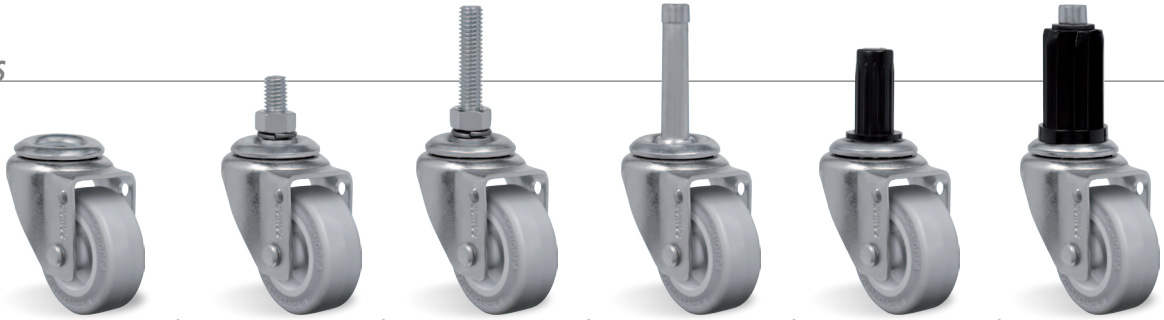


Reference	Axle hole 10mm	Threaded Stem 3/8" x 25mm	Threaded Stem 3/8" x 50mm	Stem Ø7/16" X 50mm	Nylon Socket Ø15mm X 32mm	Nylon Socket Fitting
Reference	LES	LE	LEX	LEL	LELSJ	See table below


Swivel Sections




Top Plate Options

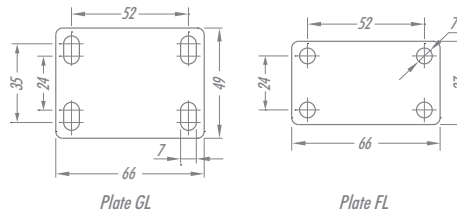

Brake Options

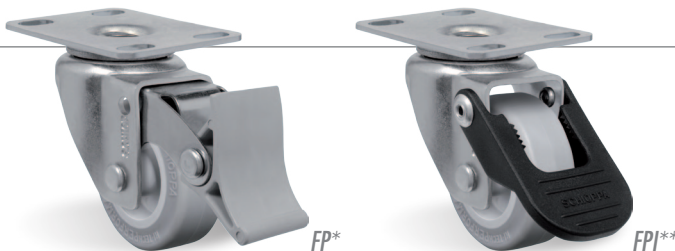

NYLON SOCKET FITTING 	
SIZE (mm)	REFERENCE
Ø38	S1
Ø30	S2
Ø25	S3
☑ 40 x 40	S4

* 210/310/410
 ** 210/310