

# L10

## UP - THERMOPLASTIC COMPOUND









Load capacity up to 70kg

**RIG** Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




### Wheel

UP - Thermoplastic Polyurethane. Hardness: 90 Shore A. (-20°C to + 70°C)  
Produced with recyclable thermoplastic elastollan polyurethane tread and polypropylene copolymer wheel center. Ideal for those who look for an excellent load capacity added to great floor protection with low noise rolling, offering an excellent resistance to abrasion and impacts. Resistant to greases, mineral oils and some acids. Nominal working speed is up to 4km/h.


Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake FPI (mm)
GL 158 UP	-	R 158 UP	41	17	1/4"	Plain Bearing	40	57	41	-	-
GL 210 UP	FL 210 UP	R 210 UP	50	19			45	67	45	78	75
GL 310 UP	FL 310 UP	R 310 UP	75				60	92	65	94	89
GL 410 UP	-	R 410 UP	100				70	122	89	111	-

### Fittings/Accessories

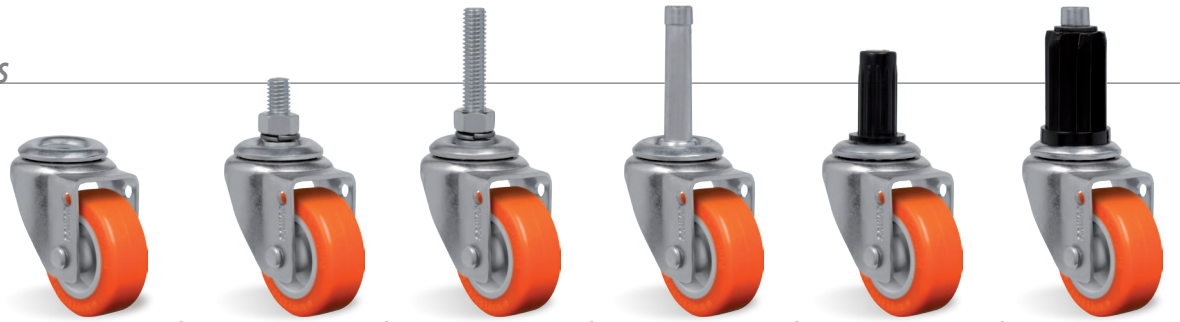


	Axle hole 10mm	Threaded Stem 3/8" x 25mm	Threaded Stem 3/8" x 50mm	Stem Ø7/16" X 50mm	Nylon Socket Ø15mm X 32mm	Nylon Socket Fitting
Reference	LES	LE	LEX	LEL	LELSJ	See table below


### Swivel Sections



### Top Plate Options

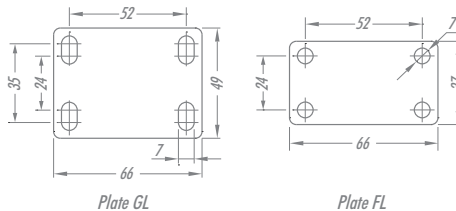

### Brake Options

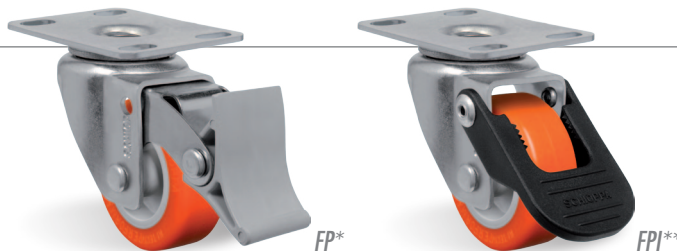

NYLON SOCKET FITTING	
SIZE (mm)	REFERENCE
Ø38	S1
Ø30	S2
Ø25	S3
40 x 40	S4

\* 210/310/410  
\*\* 210/310