

L10

NP - POLYPROPYLENE

Load capacity up to 70kg











RIG Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




Wheel

NP - Polypropylene Hardness: 65 Shore D. (-20°C to +70°C)
 Injected with recyclable polypropylene copolymer wheel center and tread. Indicated for light and medium loads, roll very easily, requiring low handling effort, resistant to deformation under static loads, with an excellent cost-benefit ratio. They present a good resistance to chemicals and moderate impacts. Nominal working speed is up to 4km/h. Produced with recycled materials.


Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake FPI (mm)
GL 158 NP	-	R 158 NP	41	17	1/4"	Plain Bearing	40	57	41	-	-
GL 210 NP	FL 210 NP	R 210 NP	50	19			45	67	45	78	75
GL 310 NP	FL 310 NP	R 310 NP	75				60	92	65	94	89
GL 410 NP	-	R 410 NP	100				70	122	89	111	-

Fittings/Accessories

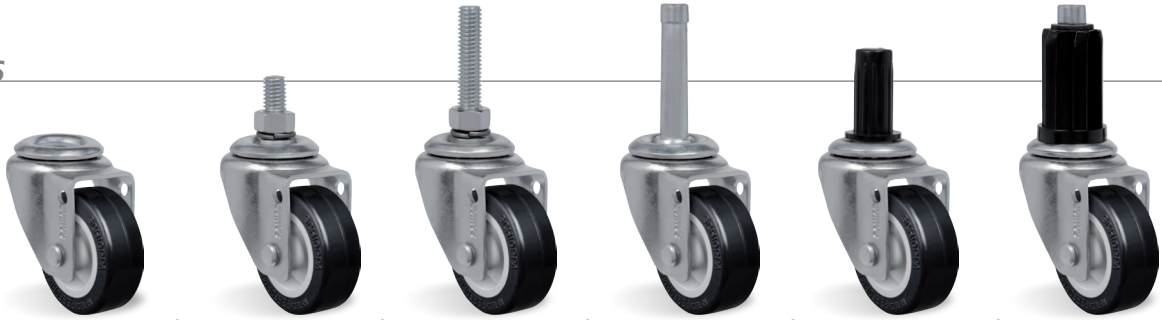


Reference	Axle hole 10mm	Threaded Stem 3/8" x 25mm	Threaded Stem 3/8" x 50mm	Stem Ø7/16" X 50mm	Nylon Socket Ø15mm X 32mm	Nylon Socket Fitting
Reference	LES	LE	LEX	LEL	LELSJ	See table below


Swivel Sections




Top Plate Options

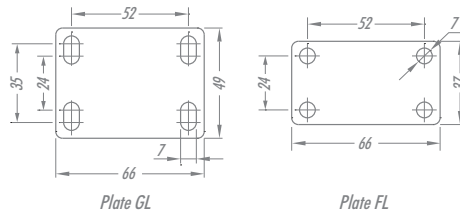

Brake Options

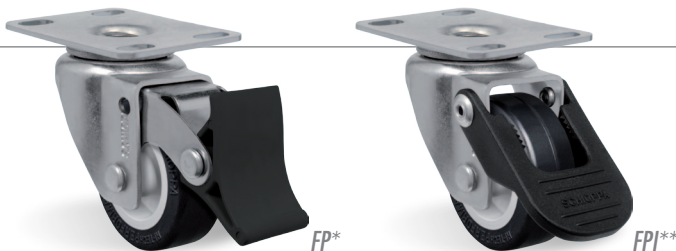

NYLON SOCKET FITTING 	
SIZE (mm)	REFERENCE
Ø38	S1
Ø30	S2
Ø25	S3
☑ 40 x 40	S4

* 210/310/410
 ** 210/310