

# L10

## NPP - POLYPROPYLENE

Load capacity up to 60kg

### RIG









Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




### Wheel

NPP - Polypropylene. Hardness: 65 Shore D. (-20°C to + 70°C)

Produced with single injection recyclable polypropylene copolymer. Indicated for light loads, roll very easily, requiring low handling effort, resistant to deformation under static loads, with an excellent cost-benefit ratio. They present a good resistance to chemicals and moderate impacts. Nominal working speed is up to 4km/h.


Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake FPI (mm)
GL 158 NPP	-	R 158 NPP	41	17	1/4"	Plain Bearing	40	57	41	-	-
GL 210 NPP	FL 210 NPP	R 210 NPP	50	19			45	67	45	78	75
GL 310 NPP	FL 310 NPP	R 310 NPP	75				60	92	65	94	89

### Fittings/Accessories

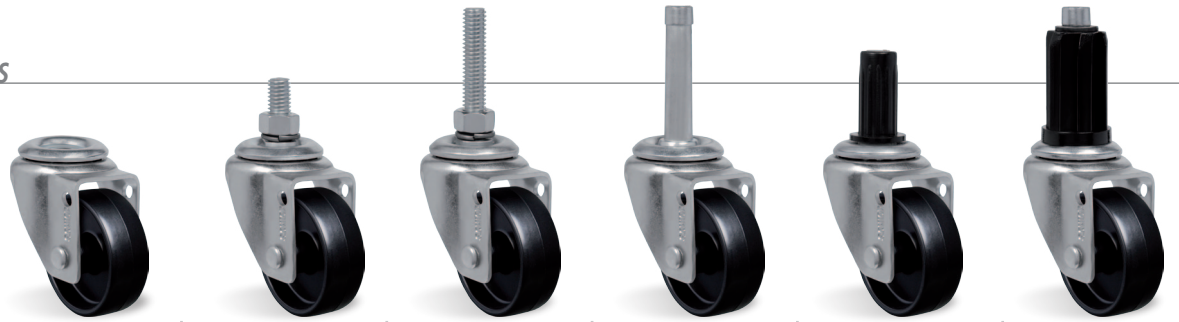


Reference	Axle hole 10mm LES	Threaded Stem 3/8" x 25mm LE	Threaded Stem 3/8" x 50mm LEX	Stem Ø7/16" X 50mm LEL	Nylon Socket Ø15mm X 32mm LELSJ	Nylon Socket Fitting See table below
-----------	--------------------------	------------------------------------	-------------------------------------	------------------------------	---------------------------------------	---


### Swivel Sections



### Top Plate Options

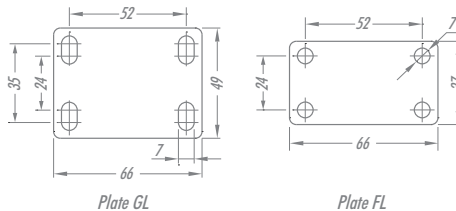

### Brake Options

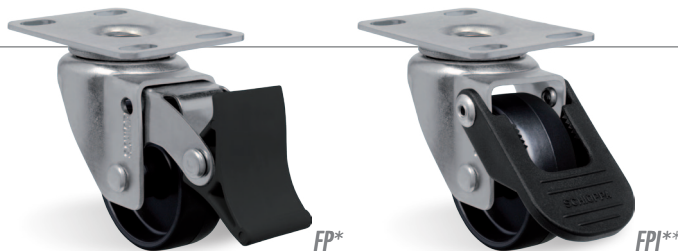

NYLON SOCKET FITTING	
SIZE (mm)	REFERENCE
Ø38	S1
Ø30	S2
Ø25	S3
40 x 40	S4

\* 210/310