

L10

NT - TECHNICAL NYLON

Load capacity up to 80kg











RIG Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.


Wheel

NT - Technical Nylon. Hardness: 75 Shore D. (-40°C to + 110°C)
Produced with high quality nylon 6.0 tread and wheel center. They are light and have an excellent mechanical resistance, roll very easily, requiring less effort in maneuvering and handling. Ideal for applications in wet environments, they are resistant to greases, oils, salts and some kinds of acids. Manufactured of recycled material. Nominal working speed is up to 4km/h.




Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake FPI (mm)
GL 158 NT	-	R 158 NT	41	17	1/4"	Plain Bearing	80	57	41	-	-
GL 210 NT	FL 210 NT	R 210 NT	50	19				67	45	78	75
GL 310 NT	FL 310 NT	R 310 NT	75					92	65	94	89
GL 410 NT	-	R 410 NT	100					122	89	111	-

Fittings/Accessories

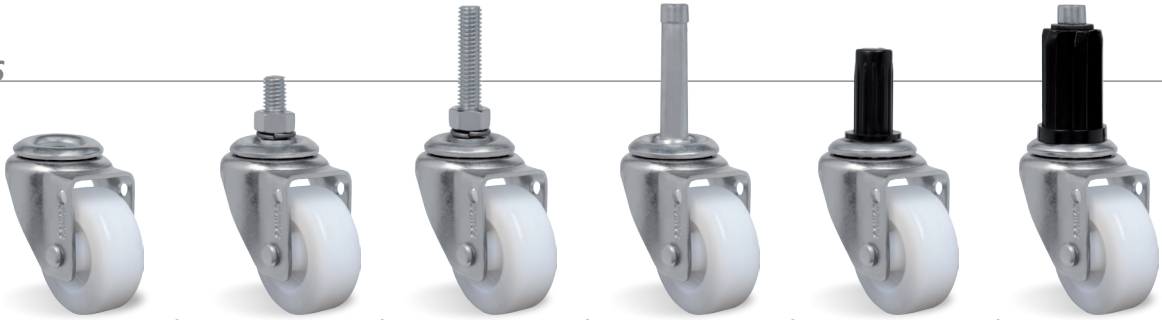


Reference	Axle hole 10mm	Threaded Stem 3/8" x 25mm	Threaded Stem 3/8" x 50mm	Stem Ø7/16" X 50mm	Nylon Socket Ø15mm X 32mm	Nylon Socket Fitting
	LES	LE	LEX	LEL	LELSJ	See table below


Swivel Sections




Top Plate Options

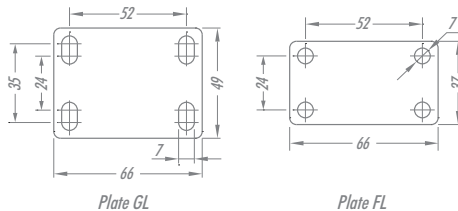

Brake Options

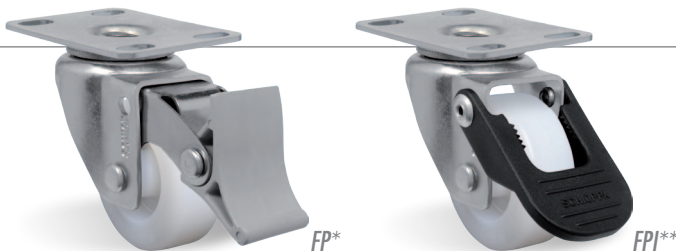

NYLON SOCKET FITTING 	
SIZE (mm)	REFERENCE
Ø38	S1
Ø30	S2
Ø25	S3
☑ 40 x 40	S4

* 210/310/410
** 210/310