

# L10

## C - CELERON









Load capacity up to 80kg

**RIG** Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.




### Wheel

C - Celeron Hardness: 103 Rockwell M. (-30°C to + 120°C)  
Manufactured with a compound obtained from macerated cotton fibers drenched with phenolic resin, molded by heat and pressure. They have excellent mechanical properties, are light and rugged, resistant to deformation under static loads and roll easily. They can be used over a wide temperature range. They are resistant to mild oils, greases and acids in low concentrations. Not recommended for applications in wet environments in contact with alkaline substances. (e.g., caustic soda, chlorine, cleaning products, soap and detergent). Nominal working speed is up to 4km/h.

Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake FP (mm)	w/ brake FPI (mm)
GL 210 C	FL 210 C	R 210 C	50	19	1/4"	Plain Bearing	80	67	45	78	75


### Fittings/Accessories

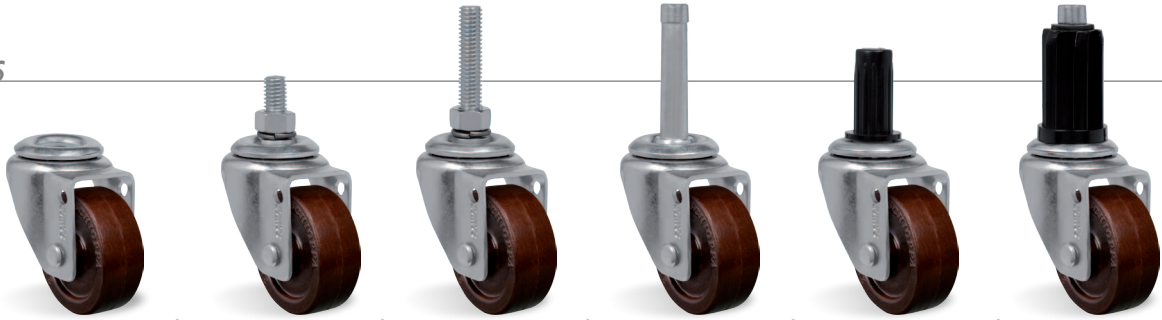


Reference	Axle hole 10mm	Threaded Stem 3/8" x 25mm	Threaded Stem 3/8" x 50mm	Stem Ø7/16" X 50mm	Nylon Socket Ø15mm X 32mm	Nylon Socket Fitting
	LES	LE	LEX	LEL	LELSJ	See table below


### Swivel Sections

### Top Plate Options

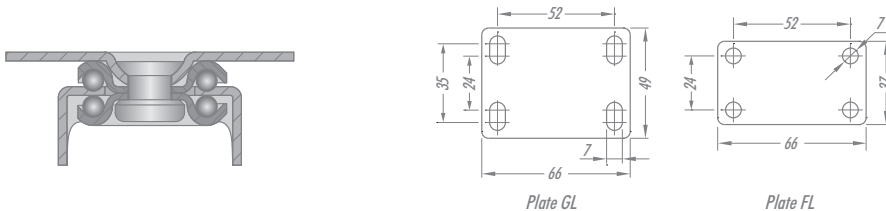

### Brake Options

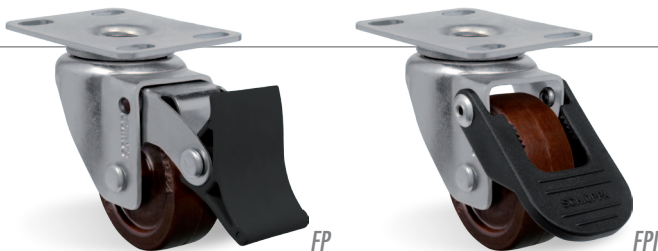

NYLON SOCKET FITTING 	
SIZE (mm)	REFERENCE
Ø38	S1
Ø30	S2
Ø25	S3
40 x 40	S4