

# L10 DOUBLE 310








**Load capacity up to 120kg**

**RIG** Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



## WHEEL

NPP - Polypropylene. Hardness: 65 Shore D. (-20°C to +70°C)  
Produced with single injection recyclable polypropylene copolymer. Indicated for light loads, roll very easily, requiring low handling effort, resistant to deformation under static loads, with an excellent cost-benefit ratio. They present a good resistance to chemicals and moderate impacts. Nominal working speed is up to 4km/h.


Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)				
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake (mm)
GLD 310 NPP	GLD 310 NPP FP	R 310 NPP	75	43	5/16"	Plain Bearing	120	95	75	107

## Fittings/Accessories




	Axle hole 13mm	Threaded Stem M10 x 25mm	Threaded Stem 3/8" NC x 25mm	Threaded Stem 3/8" NC x 50mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting
Reference	LES	LE M10	LE	LEX	LEL	See table below

## Swivel Sections




## Top Plate

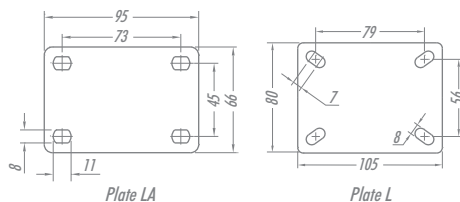

## Brake Option



NYLON SOCKET FITTING 	
SIZE (mm)	REFERENCE
Ø38	S1
Ø32	S2
Ø25	S3
40X40	S4