

L12

SP - SOFT RUBBER

Load capacity up to 125kg



RIG Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.


WHEEL

SP - Extra Soft Thermoplastic Rubber. Hardness: 65 Shore A. (-10°C to + 50°C)
 Injected recyclable thermoplastic extra soft rubber tread and polypropylene copolymer wheel center. Its advantages are the extremely low noise level and vibration reduction. Indicated for light load handling, they offer an excellent floor protection and regular resistance to impacts and chemicals. Nominal working speed is up to 4km/h.




Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake G (mm)	w/ brake SL (mm)
GL 312 SP	FL 312 SP	R 312 SP	75	32	5/16"	Plain Bearing	60	103	71	98	80
GL 312 SPN	FL 312 SPN	R 312 SPN				Plain Bearing with Thread Guards					
GL 312 SPE	FL 312 SPE	R 312 SPE				Ball Bearing					
GL 3512 SPN	FL 3512 SPN	R 3512 SPN	89			Plain Bearing with Thread Guards	65	117	83	-	83
GL 3512 SPE	FL 3512 SPE	R 3512 SPE				Ball Bearing					
GL 412 SP	FL 412 SP	R 412 SP	100			Plain Bearing	75	126	80	98	80
GL 412 SPN	FL 412 SPN	R 412 SPN				Plain Bearing with Thread Guards					
GL 412 SPE	FL 412 SPE	R 412 SPE				Ball Bearing					
GL 512 SP	FL 512 SP	R 512 SP	125			Plain Bearing	85	156	105	125	105
GL 512 SPN	FL 512 SPN	R 512 SPN				Plain Bearing with Thread Guards					
GL 512 SPE	FL 512 SPE	R 512 SPE				Ball Bearing					
GL 612 SP	FL 612 SP	R 612 SP	150			Plain Bearing	75	178	110	-	110
GL 612 SPE	FL 612 SPE	R 612 SPE		Ball Bearing							

Fittings/Accessories

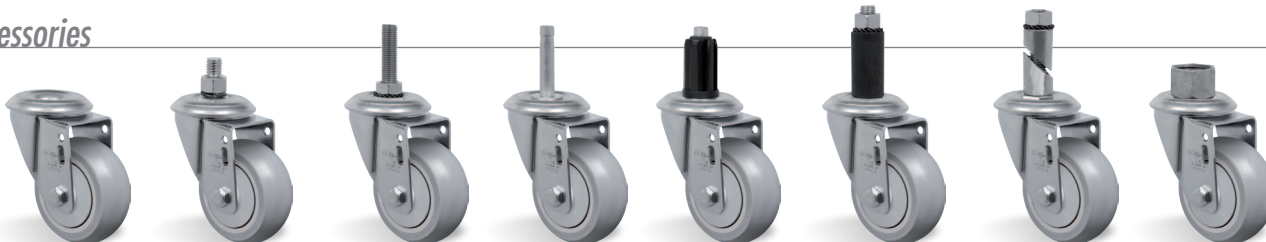


Reference	Axle hole 13mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
LES	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below


Swivel Sections



Top Plate Options

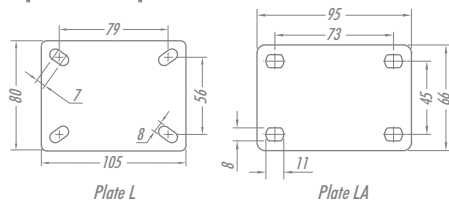

Brake Options

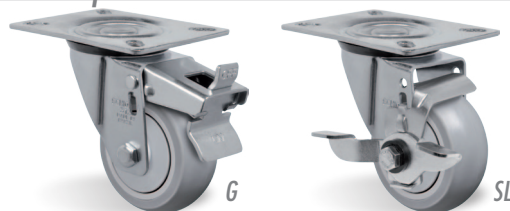

NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2				
Ø25	S3	25 - 28	EX 3	27 - 33	EA 4	T3	1" BSP
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				