

# L12

## NT - TECHNICAL NYLON

Load capacity up to 170kg



**RIG** Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.

### WHEEL

NT - Technical Nylon. Hardness: 75 Shore D. (-40°C to + 110°C)

Produced with high quality nylon 6.0 tread and wheel center. They are light and have an excellent mechanical resistance, roll very easily, requiring less effort in maneuvering and handling. Ideal for applications in wet environments, they are resistant to greases, oils, salts and some kinds of acids. Manufactured of recycled material. Nominal working speed is up to 4km/h.




Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake G (mm)	w/ brake SL (mm)
GL 312 NT	FL 312 NT	R 312 NT	75	32	5/16"	Plain Bearing	150	103	71	98	80
GL 312 NTN	FL 312 NTN	R 312 NTN				Plain Bearing with Thread Guards					
GL 312 NTE	FL 312 NTE	R 312 NTE				Ball Bearing					
GL 3512 NTN	FL 3512 NTN	R 3512 NTN	Plain Bearing with Thread Guards								
GL 3512 NTE	FL 3512 NTE	R 3512 NTE	Ball Bearing								
GL 412 NT	FL 412 NT	R 412 NT	Plain Bearing								
GL 412 NTN	FL 412 NTN	R 412 NTN	Plain Bearing with Thread Guards			170	126	80	98	80	
GL 412 NTE	FL 412 NTE	R 412 NTE	Ball Bearing								
GL 512 NT	FL 512 NT	R 512 NT	Plain Bearing								
GL 512 NTN	FL 512 NTN	R 512 NTN	Plain Bearing with Thread Guards								
GL 512 NTE	FL 512 NTE	R 512 NTE	Ball Bearing								
GL 612 NT	FL 612 NT	R 612 NT	Plain Bearing								
GL 612 NTE	FL 612 NTE	R 612 NTE	Ball Bearing	125	110	110					

### Fittings/Accessories




Reference	Axle hole 13mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
LES	LE	LEX	LEL	See table below	See table below	See table below	See table below	See table below


### Swivel Sections



### Top Plate Options

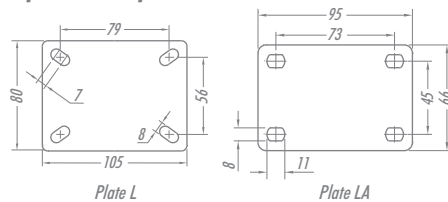

### Brake Options

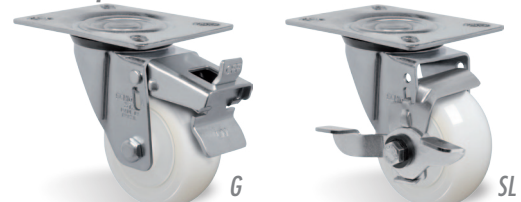

NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2	27 - 33	EA 4	T3	1" BSP
Ø25	S3	25 - 28	EX 3				
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				