

L12

C - CELERON

Load capacity up to 150kg

RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.



WHEEL

C - Celeron Hardness: 103 Rockwell M. (-30°C to + 120°C)

Manufactured with a compound obtained from macerated cotton fibers drenched with phenolic resin, molded by heat and pressure. They have excellent mechanical properties, are light and rugged, resistant to deformation under static loads and roll easily. They can be used over a wide temperature range. They are resistant to mild oils, greases and acids in low concentrations. Not recommended for applications in wet environments in contact with alkaline substances. (e.g., caustic soda, chlorine, cleaning products, soap and detergent). Nominal working speed is up to 4km/h.




Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)	KG				
Reference	Reference	Reference	(mm)	(mm)	(pol)			(mm)	w/o brake (mm)	w/ brake G (mm)	w/ brake SL (mm)
GL 312 C	FL 312 C	R 312 C	75	32	5/16"	Plain Bearing	150	103	71	98	80


Fittings/Accessories

Axle hole 13mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
Reference LES	LE	LEX	LEL	See table below	See table below	See table below	See table below


Swivel Sections



Top Plate Options

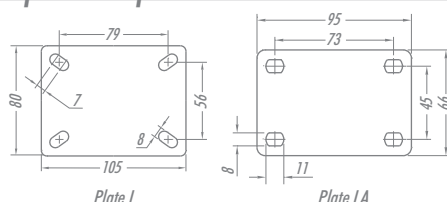

Brake Options

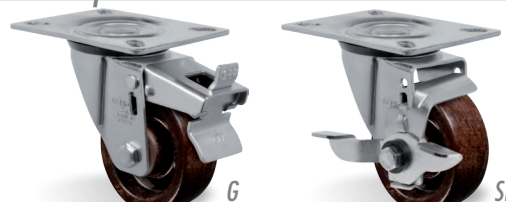

NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE		
Ø38	S1	18 - 21	EX 1			T1	1/2" BSP
Ø30	S2	21 - 24	EX 2	21 - 27	EA 2	T2	3/4" BSP
Ø25	S3	25 - 28	EX 3				
40X40	S4	27 - 30	EX 4	27 - 33	EA 4	T3	1" BSP
		37 - 40	EX 5				