

L12

P - MOLDED POLYURETHANE

Load capacity up to 170kg











RIG Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.

WHEEL


P - Molded Polyurethane. Hardness: 90 Shore A. (-40°C to +80°C)

Produced with a molded polyurethane tread and grey cast iron wheel center. Ideal for applications on various surface and environment types. They withstand high loads, protect the floor, require less effort to handle, produce low noise level during handling, and have an excellent service life. They have great resistance to abrasion, impacts, weathering and chemicals such as greases, oils, salts and solvents. They can be used at a speed of up to 4km/h.




Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)					
Reference	Reference	Reference	(mm)	(mm)	(pol)		KG	(mm)	w/o brake (mm)	w/ brake G (mm)	w/ brake SL (mm)
GL 312 PN	FL 312 PN	R 312 PN				Plain Bearing					
GL 312 PR	FL 312 PR	R 312 PR	75	32	5/16"	Roller Bearing	170	103	71	98	80
GL 312 PE	FL 312 PE	R 312 PE				Ball Bearing					

Fittings/Accessories

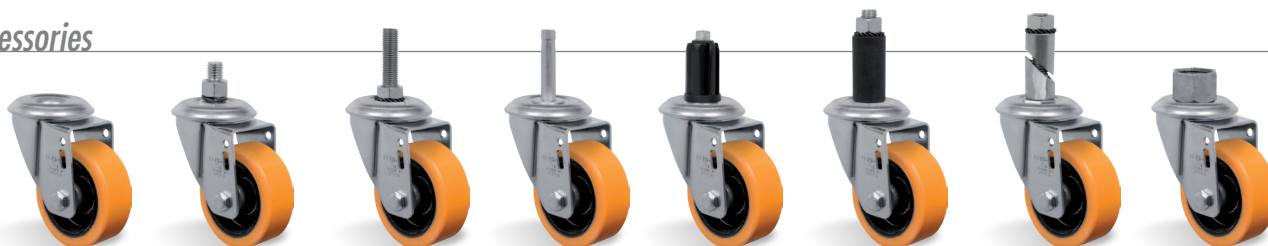


Reference	Axle hole 13mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
LES	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below


Swivel Sections






Top Plate Options

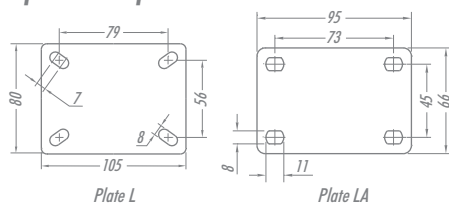

Brake Options

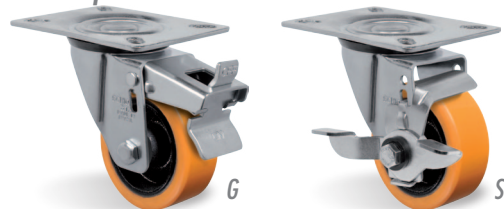

NYLON SOCKET FITTING 		RUBBER EXPANDER FITTING 		ALUMINUM EXPANDER FITTING 		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE		
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T1	1/2" BSP
Ø30	S2	21 - 24	EX 2	27 - 33	EA 4	T2	3/4" BSP
Ø25	S3	25 - 28	EX 3			T3	1" BSP
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				