

L14 - S14

TB - THERMOPLASTIC RUBBER

Load capacity up to 125kg

RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.

WHEEL

TB - Thermoplastic Rubber. Hardness: 80 Shore A. (-20°C to + 70°C)
Produced with recyclable thermoplastic elastic rubber tread and polypropylene copolymer wheel center. They present an excellent floor protection, soft and quiet rolling, easiness to handling and maneuvering, impact resistance, have a low deformation index under load and excellent abrasion resistance. They have a good resistance to weathering and chemicals such as salts and greases. Nominal working speed is up to 4km/h.




Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	(mm)	(mm)	(pol)	Axle Type (bearing)	KG	GL/FL (mm)	FL/FS (mm)	w/o brake (mm)	w/ brake G (mm)	
Reference	Reference	Reference	Reference	Reference										
GL 414 TBN	FL 414 TBN	GS 414 TBN	FS 414 TBN	R 414 TBN	100	38	7/16"	Nylon Socket	85	135	140	88	120	
GL 414 TBE	FL 414 TBE	GS 414 TBE	FS 414 TBE	R 414 TBE		32		Ball Bearing						
GL 514 TBN	FL 514 TBN	GS 514 TBN	FS 514 TBN	R 514 TBN	125	38		Nylon Socket	115	156	161	103		
GL 514 TBE	FL 514 TBE	GS 514 TBE	FS 514 TBE	R 514 TBE		32		Ball Bearing						
GL 614 TBN	FL 614 TBN	GS 614 TBN	FS 614 TBN	R 614 TBN	150	38		Nylon Socket	125	178	183	118		130
GL 614 TBE	FL 614 TBE	GS 614 TBE	FS 614 TBE	R 614 TBE		32		Ball Bearing						

Fittings/Accessories


Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below
	Axle hole 16mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's

Note: Stem casters overall heights are 3mm less than indicated on table.

Swivel Sections



Top Plate Options

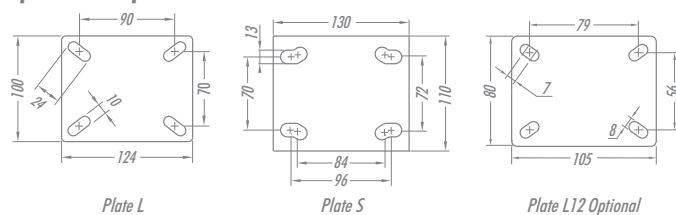

Brake Option



NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2			T3	1" BSP
Ø25	S3	25 - 28	EX 3	27 - 33	EA 4		
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				