

L14 - S14

NP - POLYPROPYLENE

Load capacity up to 165kg



RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.

WHEEL

NP - Polypropylene Hardness: 65 Shore D. (-20°C to +70°C)

Injected with recyclable polypropylene copolymer wheel center and tread. Indicated for light and medium loads, roll very easily, requiring low handling effort, resistant to deformation under static loads, with an excellent cost-benefit ratio. They present a good resistance to chemicals and moderate impacts. Nominal working speed is up to 4km/h. Produced with recycled materials.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel				Axle Type (bearing)	KG					
Reference	Reference	Reference	Reference	Reference	(mm)	(mm)	(pol)			GL/FL	FL/FS	w/o brake (mm)	w/ brake G (mm)	
GL 414 NPN	FL 414 NPN	GS 414 NPN	FS 414 NPN	R 414 NPN	100	38	7/16"	Nylon Socket	125	135	140	88	120	
GL 414 NPE	FL 414 NPE	GS 414 NPE	FS 414 NPE	R 414 NPE				32						Ball Bearing
GL 514 NPN	FL 514 NPN	GS 514 NPN	FS 514 NPN	R 514 NPN	125	38		Nylon Socket	150	156	161	103		
GL 514 NPE	FL 514 NPE	GS 514 NPE	FS 514 NPE	R 514 NPE				32						Ball Bearing
GL 614 NPN	FL 614 NPN	GS 614 NPN	FS 614 NPN	R 614 NPN	150	38		Nylon Socket	165	178	183	118		130
GL 614 NPE	FL 614 NPE	GS 614 NPE	FS 614 NPE	R 614 NPE				32						


Fittings/Accessories




	Axle hole 16mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below

Note: Stem casters overall heights are 3mm less than indicated on table.

Swivel Sections



Top Plate Options

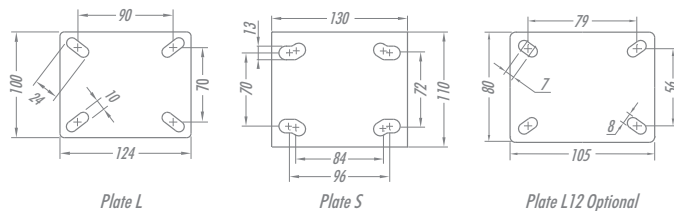

Brake Option



NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE		
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T1	1/2" BSP
Ø30	S2	21 - 24	EX 2				
Ø25	S3	25 - 28	EX 3	27 - 33	EA 4	T2	3/4" BSP
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5			T3	1" BSP