



L14 - S14

BP - PVC

Load capacity up to 125kg



RIG

Made of stamped steel plate and swivel head with double ball raceway, zinc-plated finish. Bolted wheel axle.


WHEEL

BP - Thermoplastic Compound with PVC. Hardness: 80 Shore A. (-10°C to + 50°C)
Produced with recyclable thermoplastic compound with PVC tread and polypropylene copolymer wheel center. They offer a soft and quiet rolling, great floor protection, good chemical, wear and impact resistance, resulting in an excellent cost-benefit ratio. Nominal working speed is up to 4km/h.



Swivel Caster	Rigid Caster	Swivel Caster	Rigid Caster	Wheel	(mm)	(mm)	(pol)	Axle Type (bearing)	KG	(mm)		w/o brake (mm)	w/ brake G (mm)	
Reference	Reference	Reference	Reference	Reference						GL/FL	GS/FS			
GL 414 BPN	FL 414 BPN	GS 414 BPN	FS 414 BPN	R 414 BPN	100	38	7/16"	Nylon Socket	85	135	140	88	120	
GL 414 BPE	FL 414 BPE	GS 414 BPE	FS 414 BPE	R 414 BPE		32		Ball Bearing						
GL 514 BPN	FL 514 BPN	GS 514 BPN	FS 514 BPN	R 514 BPN	125	38		Nylon Socket	115	156	161	103		
GL 514 BPE	FL 514 BPE	GS 514 BPE	FS 514 BPE	R 514 BPE		32		Ball Bearing						
GL 614 BPN	FL 614 BPN	GS 614 BPN	FS 614 BPN	R 614 BPN	150	38		Nylon Socket	125	178	183	118		130
GL 614 BPE	FL 614 BPE	GS 614 BPE	FS 614 BPE	R 614 BPE		32		Ball Bearing						


Fittings/Accessories

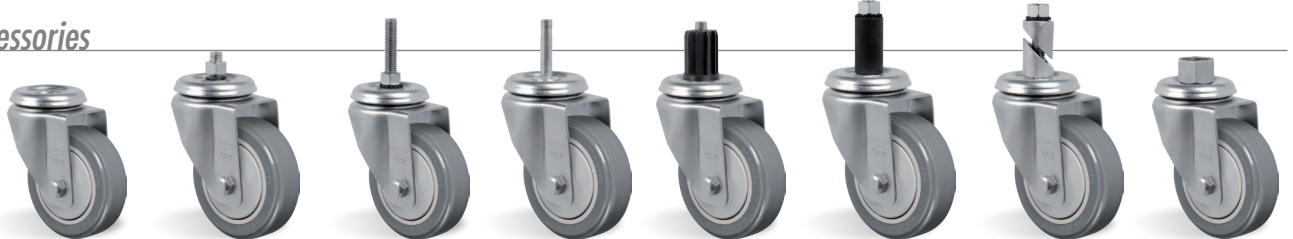


	Axle hole 16mm	Threaded Stem 1/2"NC X 25mm	Threaded Stem 1/2"NC X 64mm	Stem Ø7/16" X 50mm	Nylon Socket Fitting	Rubber Expander Fitting	Aluminum Expander Fitting	Fitting Cap's
Reference	LES	LE	LEX	LEL	See table below	See table below	See table below	See table below

Note: Stem casters overall heights are 3mm less than indicated on table.

Swivel Sections



Top Plate Options

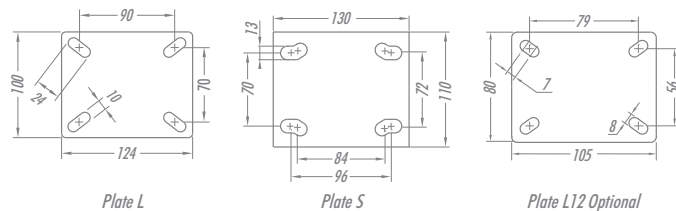

Brake Option



NYLON SOCKET FITTING		RUBBER EXPANDER FITTING		ALUMINUM EXPANDER FITTING		CAP'S N°	THREAD
SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	SIZE (mm)	REFERENCE	T1	1/2" BSP
Ø38	S1	18 - 21	EX 1	21 - 27	EA 2	T2	3/4" BSP
Ø30	S2	21 - 24	EX 2			T3	1" BSP
Ø25	S3	25 - 28	EX 3	27 - 33	EA 4		
40X40	S4	27 - 30	EX 4				
		37 - 40	EX 5				